


Type: DA10-NS40/Pxx Profibus DP

DA10-NS40/PxR
case 48 x 24 mm



DA10-NS40/PxR-7
case 72 x 24 mm



DA10-NS40/PxR-4
case 48 x 48 mm




programming mode


enter into programming mode and to the next code-number by operating of push-button T3

menu-position	display	description
0	Pr 0 0 0 0 1 2 7	address 1. device 128. device select digit with T2 adjust selected digit with T1
1	Pr 1 0 1 0	code BCD ASCII brightness adjustment (0 ... 9) 0 = bright 9 = dark
	EEP	data will be saved Instrument changes into standard mode


top view



rear view



rear connector with screw-type terminals



technical data

aux. supply:	18 - 35 VDC
power consumption:	max. 1,8 VA
temperature range:	0 ... 50 °C
panel cutout	DA10-NS40/P1xx: 45(+0,6) x 22,2(+0,3)mm DA10-NS40/P1xx-4: 45(+0,6) x 45(+0,6)mm DA10-NS40/P1xx-7: 68(+0,7) x 22,2(+0,3)mm
mounting depth:	91 mm
bezel height:	5,25 mm
display:	height 10mm, LED red or green
baud rate(self-acting recognition):	≤ 12MBaud
addresses (0 ...127):	programmable top side over keypad
protocol:	Profibus-DP
hardware:	SPC3 Feldbus side electrically isolated

telegram construction ASCII

byte	description	ASCII
1.	Digit 1 $\cong 10^0$	3xH
2.	Digit 2 $\cong 10^1$	3xH
3.	Digit 3 $\cong 10^2$	3xH
4.	Digit 4 $\cong 10^3$	3xH
5.		
6.	free	

decimal point at every position
insertable

telegram construction BCD

byte	function
1.	10^1 10^0
2.	10^3 10^2
3.	free free
4.	free free
5.	free free
6.	free comma display

0 0 0 0 0 000
0 0 0 0 1 000,0
0 0 1 0 0 00,00
0 0 1 1 1 0,000


sign rate ASCII/Hex:

Hex	20	2C	2D	2E	30	31	32	33	34	35	36	37	38	39	3D	41	43	45	46	48	4C	50	55	5D	5F	62	63	64	68	6E	6F	72	75	78	7E
digit	.	-	0	1	2	3	4	5	6	7	8	9	=	A	C	E	F	H	L	P	U]	-	b	c	d	h	n	o	r	u	+]]	

unknown sign

sign rate BCD:

BCD	LLLL	LLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHL
digit	0	1	2	3	4	5	6	7	8	9	-	+	blank

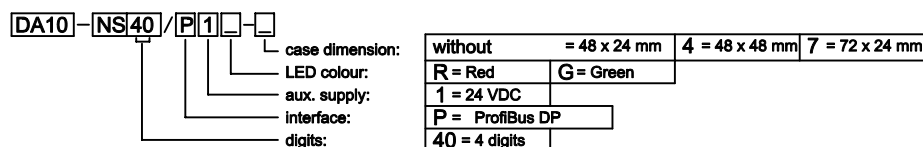

GS Gebhardt & Schäfer Industrie-Elektronik GmbH

Porschestr. 11
D-51381 Leverkusen
Tel. +49 (0) 21 71 / 73 72 2 -0
Fax +49 (0) 21 71 / 73 72 2 -39
Internet: <http://www.GS-GmbH.de>
E-Mail: info@GS-GmbH.de

Kölner Bank eG
IBAN: DE62 3716 0087 0940 9250 10
BIC: GENODE33
Kreissparkasse Köln
IBAN: DE65 3705 0299 0312 0061 45
BIC: COKSDE33

Deutsche Bank AG
IBAN: DE30 3757 0024 0851 0851 00
BIC: DEUTDE33
Foreign Payments:
Account-No. 851 085 1
S.W.I.F.T. DEUTDE33 375

Geschäftsführer: 2.5
Karlheinz Schäfer
Guido Gebhardt
USt.-Nr. DE 123713297
Amtsgericht Köln, HRB 48860
D-U-N-S@: 340802073